

# PRESIDENT

## BILL II +

### AM / FM

### 12 V

## SIMPLY COMPACT



## FEATURES

- **P CHANNELS**
  - **Microphone Up/Down activation/deactivation**
  - **NRC**
  - Ultra-compact
  - 7 Color display
  - 2 Emergency programmable channels (EMG)
  - Electret / dynamic compatible microphone
  - ANL / NB / Hi-Cut
  - Scan / Scan Skip
  - Key Beep / Roger Beep
  - USB charging plug
  - Lock
  - Vox (Hands-free function)
  - ...
- **Supplied accessories:**
    - 1 Electret UP/DOWN microphone
    - 1 Support
    - 1 Mounting cradle
    - 1 Quick fixation clip
    - Screws and fused power cord

Art. N° TXPR201



3 435991 104197



Non-contractual photo


\*See warranty conditions on our website

Groupe **PRESIDENT** ELECTRONICS since 1978  
S.A. Capital 10.000.000 €  
Siège Social / Head Office – France – Route de Sète  
BP 100 – 34540 BALARUC  
Site : <http://www.president-electronics.com>  
e-mail : [groupe@president-electronics.com](mailto:groupe@president-electronics.com)



Compatible  
**REMOTE BT MIKE**  
**REMOTE MIKE**

## Functions

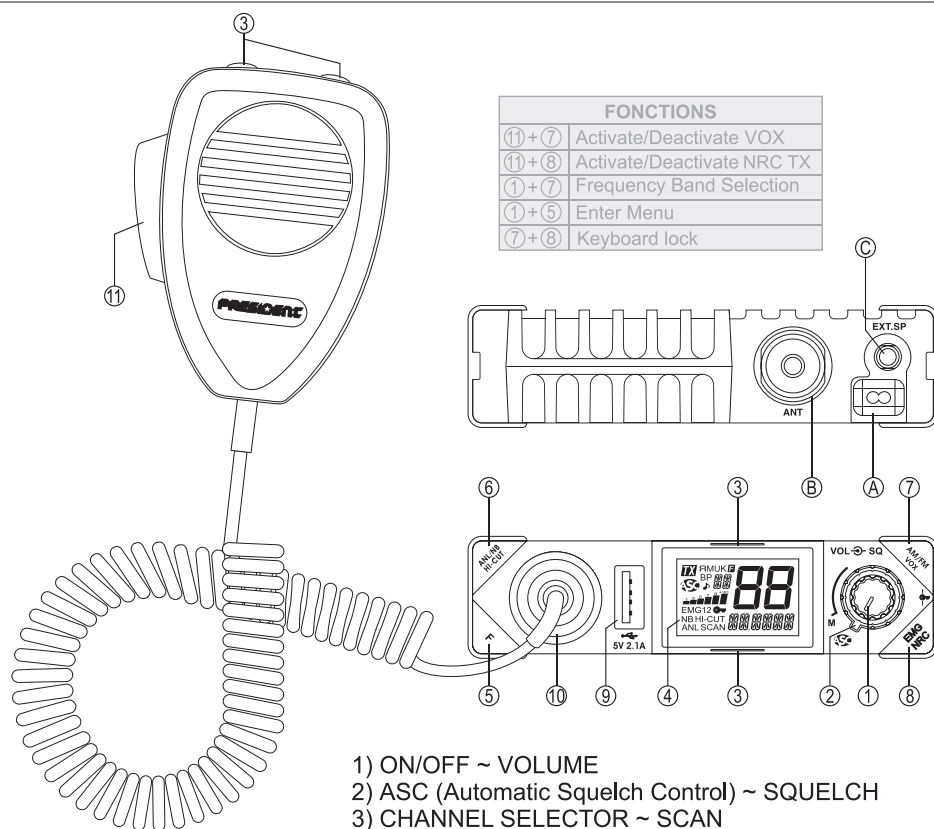

| FONCTIONS |                            |
|-----------|----------------------------|
| ⑪+⑦       | Activate/Deactivate VOX    |
| ⑪+⑧       | Activate/Deactivate NRC TX |
| ①+⑦       | Frequency Band Selection   |
| ①+⑤       | Enter Menu                 |
| ⑦+⑧       | Keyboard lock              |

- A) DC-POWER TERMINAL (13,2 V)  
 B) ANTENNA CONNECTOR (SO-239)  
 C) EXTERNAL SPEAKER JACK (8 Ω, Ø 3,5 mm)

### MENUS

- 1) COLOR
- 2) KEY BEEP
- 3) ROGER BEEP
- 4) EMG SET
- 5) MIC TYPE
- 6) ACCESSORY VOLUME
- 7) SCAN SKIP
- 8) NRC RX
- 9) NRC TX
- 10) P CHANNELS
- 11) ON/OFF UP/DN MIC
- 12) RESET

### FUNCTIONS TURNING ON THE UNIT

- FREQUENCY BAND SELECTION (F)
- MENU MODE

### FUNCTIONS WITH THE PTT SWITCH

- VOX
- NRC TX

### 1) GENERAL

- Channels : 40
- Modulation modes : AM / FM
- Frequency range : 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V
- Dimensions (mm) : 102 (W) x 100 (D) x 25 (H)
- Weight : ± 0.320 kg
- Supplied accessories : Electret UP/DOWN microphone with support, mounting cradle, quick fixation clip, screws and fused power cord.

### 2) TRANSMISSION

- Frequency allowance : ± 200 Hz
- Carrier power : 4 W
- Transmission interference : < 4 nW (- 54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adj. channel : < 20 μW
- Microphone sensitivity : 7 mV
- Max. drain : 1.7 A (13.2 V)
- Modul. signal distortion : 2 %

### 3) RECEPTION

- Max. sensitivity at 20 dB sinad : 0.5 μV - 113 dBm (AM)  
0.35 μV - 116 dBm (FM)
- Frequency response : 300 Hz to 3 kHz
- Adj. channel selectivity : 60 dB
- Max. audio power : 2.5 W
- Squelch sensitivity : min. 0.2 μV - 120 dBm  
max. 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Drain : 180 ~ 550 mA

## Specifications



All European standards

